

## MOBILE SUMP TRAYS TYPE AW 60 SR



AW 60-1 SR



AW 60-1 SRF

	Max. no. of drums no. x litre	Dimensions in mm (l x w x h) incl. handle	Dim. tray only in mm (l x w x h)	Retention capacity in l	Weight painted / galv. in kg
AW 60-1 SR	2 x 60	940 x 500 x 1075	800 x 500 x 415	72	39 / 42
AW 60-1 SRF	1 x 60	940 x 500 x 1075	800 x 500 x 415	72	49 / 52

### Mobile storage of 60 litre drums

- construction made of 3 mm steel sheet
- galvanized grid  
(load capacity 1000 kg/m<sup>2</sup>)

### Types available

#### AW 60-1 SR

- storage of max. 2 x 60 litre drums in an upright position
- 2 swivel + 2 fixed polyamide castors  
Ø 100 mm, one swivel castor with brake  
– construction height 125 mm
- handle

#### AW 60-1 SRF

- storage of 1 x 60 litre drum in a horizontal position
- 2 swivel + 2 fixed polyamide castors  
Ø 100 mm, one swivel castor with brake  
– construction height 125 mm
- handle
- Drum Support FA 60-1, galvanized, for 60 l drums,  
for horizontal storage and filling, kit form

## SUMP TRAYS TYPE AST / AW-F



AST




AW-F 2 with fixture and tension belt

Applies to all products shown on this page



- every unit tested for leakage
- flammable liquids, GHS categories 1 - 3
- hazardous to aquatic environment, GHS categories 1 - 4

► Accessories please refer to page 106

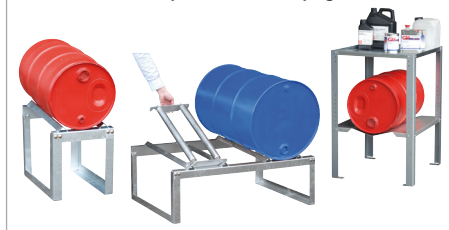

	Max. no. of 200 litre drums	Dimensions in mm (l x w x h) incl. handle	Dim. tray only in mm (l x w x h)	Retention capacity in l	Weight painted/galv. in kg
AST	1	1280 x 800 x 1110	1200 x 800 x 565	250	91 / 95
AW-F 1	1	870 x 800 x 1110	800 x 800 x 695	243	69 / 73
AW-F 2	2	1200 x 800 x 1110	1200 x 800 x 565	250	78 / 82

### Storage of max. 2 x 200 litre drums

- construction made of 3 mm steel sheet
- galvanized grid  
(load capacity 1000 kg/m<sup>2</sup>)
- reinforced edging as grid support

### Types available

#### AST

- Drum Support FA 200-1, galvanized
- 2 swivel + 2 fixed polyamide castors  
Ø 180 mm, one swivel castor with brake  
– construction height 225 mm
- handle

#### AW-F

- 2 swivel + 2 fixed polyamide castors  
Ø 180 mm, one swivel castor with brake  
– construction height 225 mm
- handle

### Accessories

- for AST:  
Clip-on Rotating Support type RA 200 for  
rotating the drums, galvanized
- for AW-F:  
fixture and tension belt