

# TILTING CONTAINER TYPE GU



## The Original - low structural height

- ideal angle for emptying
- can be emptied at any height by cable operated from the driver's seat
- body with all-round reinforced edging
- sturdy frame with fork sleeves
- can be secured to prevent slipping and unintentional emptying
- wheels can be fitted later

## Accessories

- 2 swivel + 2 fixed polyamide castors  
Ø 180 mm, one swivel castor with brake  
– construction height 225 mm
- galvanized lid, can be opened from both sides
- pick-up for a crane, lever trolley or pallet truck
- trailer coupling and towing bar
- welding, oil- and watertight
- adjustable dumping brake

## Individual construction on request e.g.

- stainless steel
- adjustable dumping brake
- pick-up for bale gripper
- extender frame attached by screws to increase the volume (retrofit assembly)

Note:  
other sizes available (please refer to page 11,  
Mini Tilting Containers)



GU with castors



GU with lid




GU with extender frame



GU with adjustable dumping brake



Trailer coupling and towing bar

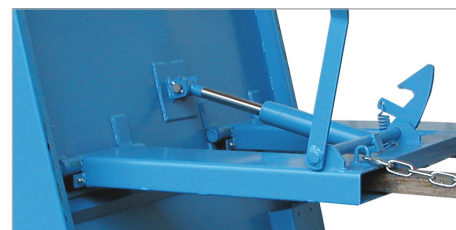

Adjustable dumping brake

|         | Volume<br>(approx.) in m <sup>3</sup> | Dimensions<br>in mm (l x w x h) | Load capacity<br>in kg | Weight<br>in kg (painted/galv.) |
|---------|---------------------------------------|---------------------------------|------------------------|---------------------------------|
| GU 300  | 0,30                                  | 1440 x 680 x 580                | 750                    | 93 / 100                        |
| GU 500  | 0,50                                  | 1440 x 780 x 680                | 1000                   | 111 / 120                       |
| GU 750  | 0,75                                  | 1440 x 1280 x 680               | 1000                   | 139 / 150                       |
| GU 1000 | 1,00                                  | 1640 x 1280 x 780               | 1500                   | 184 / 202                       |
| GU 1500 | 1,50                                  | 1640 x 1280 x 1090              | 1500                   | 215 / 236                       |
| GU 2000 | 2,00                                  | 1640 x 1680 x 1090              | 1500                   | 244 / 268                       |

| Fork sleeve inside dimensions in mm |     |     |    |
|-------------------------------------|-----|-----|----|
|                                     |     |     |    |
|                                     | A   | B   | C  |
| GU 300                              | 10  | 200 | 60 |
| GU 500                              | 150 | 200 | 60 |
| GU 750-2000                         | 495 | 200 | 60 |

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized