

ACCESS SAFETY PLATFORMS TYPE MB-D / MB-F / MB-K

Access Safety Platforms ensure safety for repairs and maintenance work



- number of persons permitted: 2
- fork sleeves with safety mechanism to prevent slipping
- "DGUV" compliant (German Use of Work Equipment Directive) and approved by the German Association for Technical Inspection "TÜV")

Types available

MB-D

- picked up broadside by a forklift truck
- galvanized tool deposit

MB-D/L

- picked up lengthwise by a forklift truck (narrow base)
- galvanized tool deposit

MB-F

- folding construction
- in just a few steps the platform is ready for use
- galvanized tool deposit
- picked up broadside by a forklift truck

MB-K-IV

- according to DIN EN 14502-1
- load capacity 300 kg
- support legs, 135 mm ground leeway
- galvanized roof
- galvanized tool deposit inside
- standard includes a 4-leg chain
- pick up by crane
- PPE anchor points (personal protective equipment)

Accessories

- 2 swivel + 2 fixed polyamide castors Ø 180 mm, one swivel castor with brake
- construction height 220 mm (not type MB-K-IV)
- PPE anchor points (personal protective equipment) not type MB-K-IV or MB-F



MB-D



MB-D/L




MB-K-IV



MB-F



PPE anchor points (personal protective equipment)

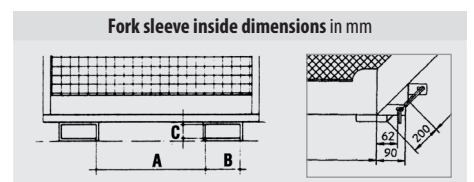

	Dimensions in mm (l x w x h)	Floor area in mm	Total permitted weight in kg	Weight in kg (painted/galv.)	A	B	C
MB-D	1040 x 1210 x 1890	800 x 1200	300	120 / 132	600	200	80
MB-D/L	1290 x 805 x 1890	1200 x 800	300	120 / 132	160	200	80
MB-F	1100 x 1210 x 1895	1000 x 1200	300	120 / 132	600	200	80
MB-K-IV	800 x 1200 x 2305	800 x 1200	470	170 / 183	-	-	-

Finish:

RAL 2000

RAL 5012

hot-dip galvanized