



SHAFTS SCREENER MB-HDS207

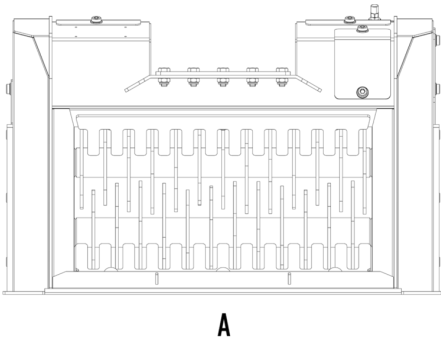

A

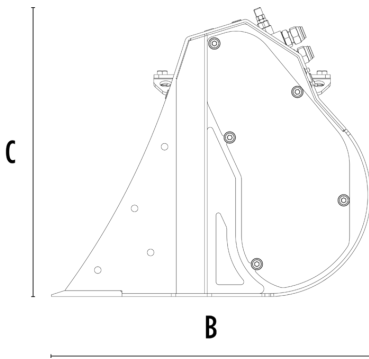

B



SPECIFICATIONS






| | | |
|----------------------------|----------------|-----------|
| Recommended excavator | ton | 1,3 - 2,8 |
| Recommended backhoe loader | ton | 3 - 4* |
| Weight | ton | 0,098 |
| Load capacity | m ³ | 0.05 |
| Pressure | bar | 200 - 220 |
| Back pressure | bar | < 20 |
| Oil flow rate** | l/min | 25 - 35 |
| Size A | in | 740 |
| Size B | in | 545 |
| Size C | in | 495 |

* Only compatible with the posterior boom of a Backhoe.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

| KIT | ADJUSTMENT* | APPLICATION |
|--|-------------|---|
|  RQ8 Sifting kit | 8 mm | Soil Aeration |
|  RQ15 Sifting kit | 15 mm | Sifting and sorting damp/dry materials |
|  RM Mixer kit | | Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction |

* Shafts in closed position.

OPTIONAL ACCESSORIES

| | |
|----------------------------|-----------------|
| Load capacity increase kit | Shaft holder |
| 24 Month Warranty | RQ8 Sifting kit |
| RQ15 Sifting kit | RM Mixer kit |

APPLICATION AREAS

