



SHAFTS SCREENER MB-HDS214




A

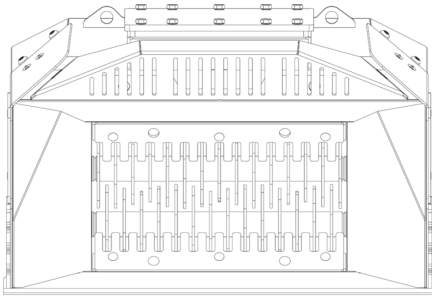

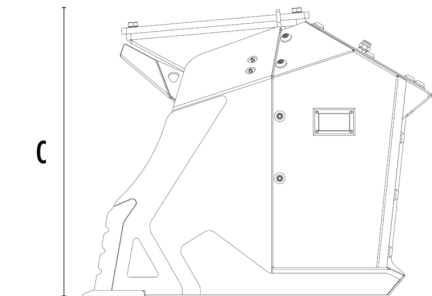


B

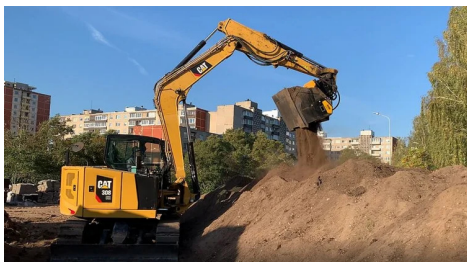C



SPECIFICATIONS








	Recommended excavator	ton	9 - 13
	Recommended backhoe loader	ton	8 - 13*
	Recommended skid steer loader**	ton	4 - 10
	Weight	ton	0,82
	Load capacity	m ³	0,4
	Pressure	bar	200 - 250
	Back pressure	bar	< 20
	Oil flow rate***	l/min	75 - 120
	Size A	in	1380
	Size B	in	1125
	Size C	in	950

* Only compatible with the posterior boom of a Backhoe.

** Please verify machine's Rated Operating Capacity.

*** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Soil Aeration Sifting and sorting damp/dry materials
 RQ20 Sifting kit	20 mm	
 RQ50 Sifting kit	50 mm	
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
 RE16 Fine sifting kit	16 mm	
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RC Compost kit
RM Mixer kit	RE16 Fine sifting kit
RE8 Fine sifting kit	

APPLICATION AREAS

 Demolitions and Renovations	 Road works and Infrastructures	 Enclosed Spaces	 Urban Construction Sites	 Remote Areas and Complex Logistics
 Pipelines	 Inert materials recycling and Waste management	 Earthmoving and Excavations	 Environmental Remediation	 Agriculture and Landscaping

