




SHAFTS SCREENER MB-HDS220

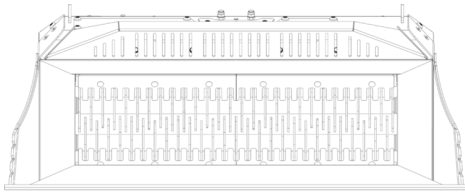

A

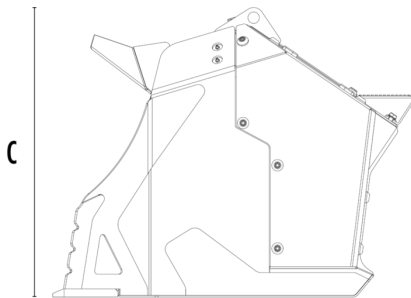

B

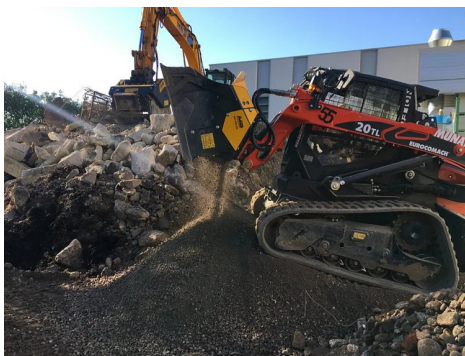

SPECIFICATIONS



Recommended backhoe loader

ton

7 - 11*



Recommended skid steer loader**

ton

4,5 - 10

Weight

ton

1

Load capacity

m³

0.6

Pressure

bar

230 - 280

Back pressure

bar

< 20

Oil flow rate***

l/min

90 - 150

Size A

in

2220

Size B

in

1060

Size C

in





890

* Only compatible with the posterior boom of a Backhoe.

** Please verify machine's Rated Operating Capacity.

*** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit  RQ20 Sifting kit	8 mm 20 mm	Soil Aeration Sifting and sorting damp/dry materials
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ20 Sifting kit
RM Mixer kit	RE8 Fine sifting kit

APPLICATION AREAS



Enclosed Spaces



Urban Construction Sites



Remote Areas and Complex Logistics



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Agriculture and Landscaping



Forest maintenance