



# SHAFTS SCREENER MB-HDS312

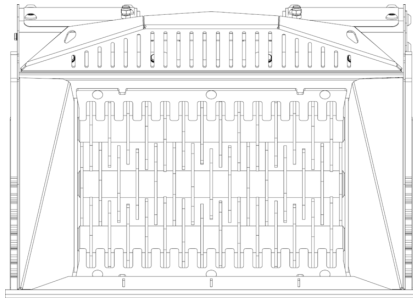

A

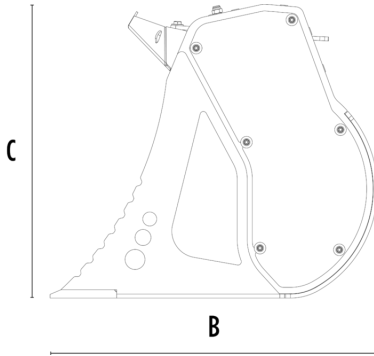

B








## SPECIFICATIONS



Recommended excavator	ton	7 - 11
Weight	ton	0,72
Load capacity	m <sup>3</sup>	0.35
Pressure	bar	200 - 250
Back pressure	bar	< 20
Oil flow rate*	l/min	75 - 100
Size A	in	1235
Size B	in	985
Size C	in	880

\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

## SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 <b>RQ8 Sifting kit</b>  <b>RQ20 Sifting kit</b>  <b>RQ50 Sifting kit</b>	8 mm 20 mm 50 mm	Soil Aeration Sifting and sorting damp/dry materials
 <b>RM Mixer kit</b>		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 <b>RE8 Fine sifting kit</b>  <b>RE16 Fine sifting kit</b>	8.5 mm 16 mm	Sifting damp/dry soil
 <b>RC Compost kit</b>	36.5 mm	Shredding foliage and small branches Composting

\* Shafts in closed position.

## OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ15 Sifting kit
RQ20 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	

## APPLICATION AREAS



Demolitions and Renovations



Road works and Infrastructures



Enclosed Spaces



Urban Construction Sites



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Agriculture and Landscaping



Forest maintenance