



SHAFTS SCREENER MB-HDS314



A



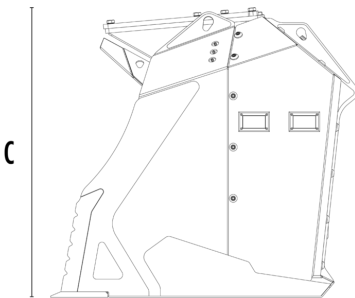

C

B










SPECIFICATIONS

	Recommended excavator	ton	13 - 20
	Recommended loader*	ton	9 - 14
	Weight	ton	1,4
	Load capacity	m ³	0.9
	Pressure	bar	230 - 280
	Back pressure	bar	< 20
	Oil flow rate**	l/min	100 - 160
	Size A	in	1430
	Size B	in	1350
	Size C	in	1250

* Please verify machine's Rated Operating Capacity.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Soil Aeration Sifting and sorting damp/dry materials
 RQ20 Sifting kit	20 mm	
 RQ50 Sifting kit	50 mm	
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
 RE16 Fine sifting kit	16 mm	
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RC Compost kit	RE8 Fine sifting kit
RE16 Fine sifting kit	

APPLICATION AREAS



Demolitions and Renovations



Road works and Infrastructures



Enclosed Spaces



Urban Construction Sites



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Agriculture and Landscaping



Forest maintenance

EN

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice. It is the responsibility of the installer to verify the suitability of the carrier machine with regard to the weight and specifications of the attachment.

MBCRUSHER.COM

Rev. 20260415