



SHAFTS SCREENER MB-HDS412



A

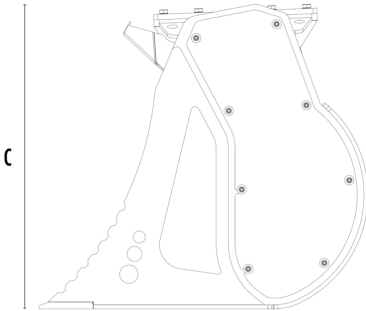

B








SPECIFICATIONS



Recommended excavator	ton	10 - 14
Weight	ton	1,2
Load capacity	m ³	0,55
Pressure	bar	230 - 280
Back pressure	bar	< 20
Oil flow rate*	l/min	90 - 150
Size A	in	1250
Size B	in	1220
Size C	in	1110

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit  RQ20 Sifting kit  RQ50 Sifting kit	8 mm 20 mm 50 mm	Soil Aeration Sifting and sorting damp/dry materials
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit  RE16 Fine sifting kit	8.5 mm 16 mm	Sifting damp/dry soil
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RC Compost kit	RE8 Fine sifting kit
RE16 Fine sifting kit	

APPLICATION AREAS



Demolitions and Renovations



Road works and Infrastructures



Enclosed Spaces



Urban Construction Sites



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Agriculture and Landscaping



Forest maintenance

