




SHAFTS SCREENER MB-HDS523

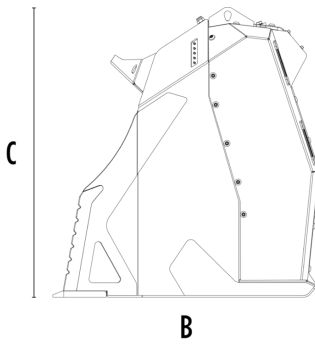

SPECIFICATIONS

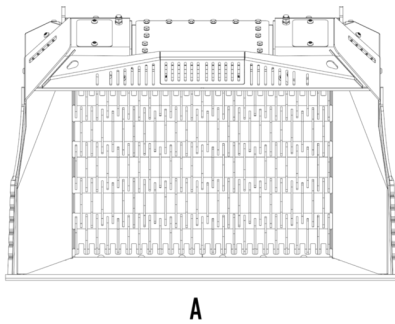








Recommended excavator	ton	30 - 45
Weight	ton	3,35
Load capacity	m ³	2,00*
Load capacity with coal capacity increase kit	m ³	2.40 - 3.50*
Pressure	bar	250 - 300
Back pressure	bar	< 20
Oil flow rate**	l/min	230 - 250
Size A	in	2330
Size B	in	1500
Size C	in	1620

* The value of the load capacity varies according to the type of material being processed.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit  RQ20 Sifting kit  RQ50 Sifting kit	8 mm 20 mm 50 mm	Soil Aeration Sifting and sorting damp/dry materials
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit  RE16 Fine sifting kit	8.5 mm 16 mm	Sifting damp/dry soil
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RC Compost kit	RE8 Fine sifting kit
RE16 Fine sifting kit	

APPLICATION AREAS



Road works and Infrastructures



Quarries and Mines



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation