

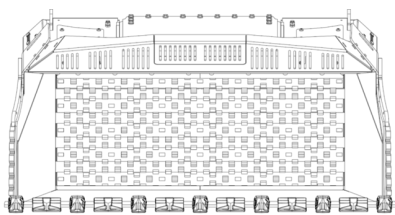


SHAFTS SCREENER MB-HDS533

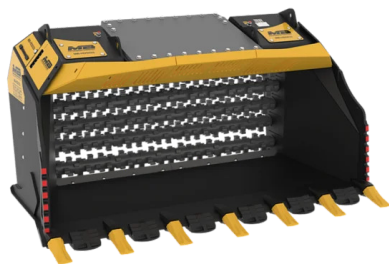

A



B

C

SPECIFICATIONS



Recommended excavator

ton

50 - 80



Recommended loader*

ton

30 - 50

Weight

ton

6,6

Load capacity

m³

3.80 - 5.20

Pressure

bar

250 - 300

Back pressure

bar

< 20

Oil flow rate**

l/min

230 - 250

Size A

in

3400

Size B

in

2130

Size C

in

1770

* Please verify machine's Rated Operating Capacity.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT

APPLICATION



RM Mixer kit

Coal reduction
Soil Aeration
Compost Aeration
Glass reduction
Drywall reduction

OPTIONAL ACCESSORIES

RM Mixer kit

APPLICATION AREAS



Road works and Infrastructures



Quarries and Mines



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation